





Technical File

Kasual Line - Free Standing

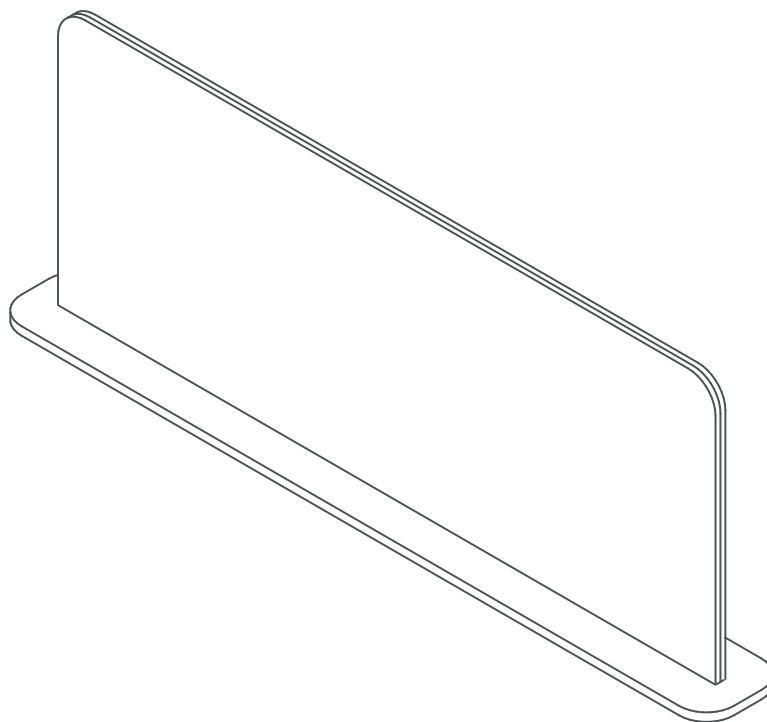

01


Dimensions

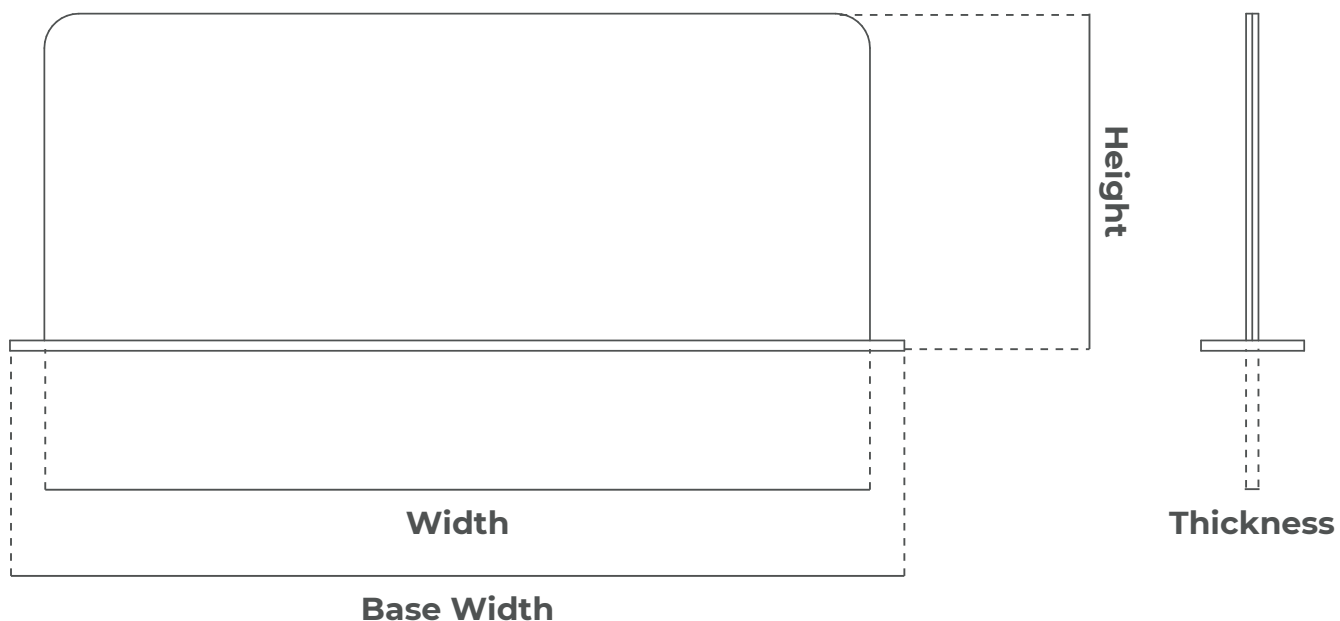

Free Standing

LATERAL

Width: 600mm Height: 490mm Base Width: 650mm Thickness: 20mm



Free Standing

FRONTAL

Width: 1200mm Height: 490mm Base Width: 1300mm Thickness: 20mm
Width: 1400mm Height: 490mm Base Width: 1500mm Thickness: 20mm


02

Finishes




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt | Solid Colour
Pearl




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt | Solid Colour
Storm



Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt | Solid Colour
Indigo Blue




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt | Melange Finish
Pewter




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt | Melange Finish
Espresso




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt | Melange Finish
Lemon




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt | Melange Finish
Ruby




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt | Melange Finish
Kelly



Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt | Melange Finish
Cerulean



Composition 100% PET
Thickness 9 mm
STANDARD 100 by OEKO-TEX®

PET Finish
Light Grey